

# Installation Instructions for 61590 to 61592, 61595 & 61596, 615951 to 615958 Flexible Braided Transmission Dipstick

## General Installation Notes:

**STOP!** Please read instructions completely before beginning installation. Call JEGS for any questions or uncertainties during the installation.

**NOTE:** The dipstick is designed for "push in" style transmissions. Each transmission dipstick has been calibrated for the specific Transmission application. The firewall mount dipstick can be mounted on the firewall or anywhere desired in the engine compartment. The trans mount dipstick varies in length according to the transmission application and mounts on the bell housing. The firewall mount is the most versatile and is used where there is little room in the engine compartment. Trans mount recommended for most fenderless vehicles

**Items Needed:** Automotive Silicone; Automotive Funnel; Mounting Screws

## Installation Instructions:

**Step 1:** Do not remove stainless braided housing from Tube Fitting Nuts or Trans Tube Fitting.

**Step 2:** Clean the opening of the transmission, being sure it is free from all debris or burrs.

**Step 3:** To install flexible transmission dipstick, remove Trans Dipstick Handle and Inner Rod from the Transmission Dipstick Housing. Be sure that the two black o-rings are in place around the Trans Tube Fitting as shown in **Fig. 1**.

**Step 4:** Apply automotive silicone around the diameter of the Tube Fitting Nut as shown in **Fig. 1**.




**Step 5:** Push Trans Tube Fitting into the opening of the transmission.

**Step 6:** For a firewall mount application, route or bend Stainless Braided Housing into the desired position in relation to the mounting distance of the desired surface (firewall, fenderwell, etc.) and mount the Mounting Bracket into position using two screws of your choice. (Not included in kit).


For a trans mount application, place the Mounting Bracket onto the bell housing using the appropriate existing bolt on the bell housing.

**Step 7:** Using the supplied funnel adapter and an automotive funnel, fill transmission to the full mark on the inner rod as shown in **Fig. 2**.


**Step 8:** Return the Trans Dipstick Handle and Inner Rod into the Stainless Braided Housing, being sure that the black o-rings are in place around the Trans Dipstick Handle as shown in **Fig. 3**.

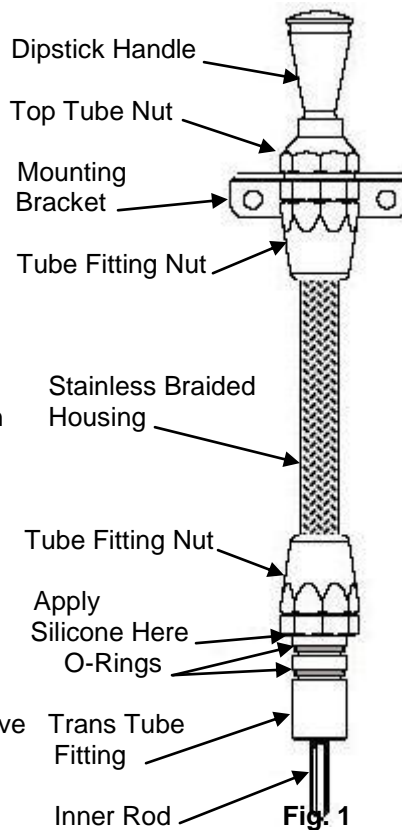

Funnel Adapter



Trans. Mount Bracket



Firewall Mount Bracket



1-800-345-4545 [jeps.com](http://jeps.com)